
Е Х S E N Storage Condition

EXSENTINC, CERANICS BASED ELECTRO, CHEMICAL TYPE SENSOR **Gas Sensor Manufacturer**

Storage Condition



Under non-operating, VOC gas and H₂O gas could adsorb to sensor. Because the sensor is ceramics it have very many pores can keep the gas. So when operate the sensor again. It may needs the time to heat to remove the gas from sensor. After the burning the gas on the sensor, sensor will be operated properly. It takes time about 1 or 2 days to burn it. so storage the sensor under dry and clean atmosphere.

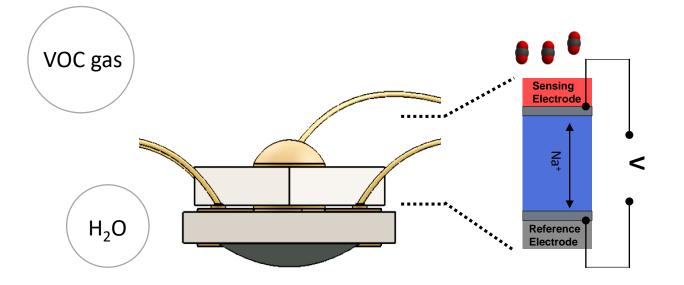